



MK2 PEDESTAL

The Nectre Mk2 is beautifully compact but yet powerful enough to heat around 185m² of living area. With a choice of freestanding legs or a pedestal base to make sure your Mk2 fireplace perfectly complements your space and design tastes.

nectre.com.au

nectre MK2 PEDESTAL

- Choice of freestanding legs or pedestal
- Cast iron door with ceramic glass
- Black metallic paint finish
- Heats up to 200m²
- 18.3kw Max average heat output
- 73% efficiency on average
- Emissions of only 1.3g/kg
- Dimensions: 750w x 560d x 744h
- Maximum log width: 475mm
- Weight: 160kg
- Freestanding Convection heating

*Estimated output depending upon operating conditions.
All dimensions are in millimeters (mm) unless specified otherwise.

BASE OPTIONS LEGS, PEDESTAL


Space Heat Output Suitable for medium to large homes (3-4 bedrooms)

Space Heat Output is only a guide based on homes with average insulation, window areas, and 2.4m ceiling heights. Differences in these factors, as well as others like, geographical location, layout of the house, living room size, type of windows all play a part in choosing the right model for your heating needs. Consult your dealer or installation contractor for more information.

*All dimensions are in millimeters (mm) unless specified otherwise and are shown without side shields fitted (if available). In the interest of product development, Glen Dimplex Australia Pty Ltd reserve the right to change product specifications without prior notice. Refer to the IOM online for the latest up to date information.



DIMENSIONS

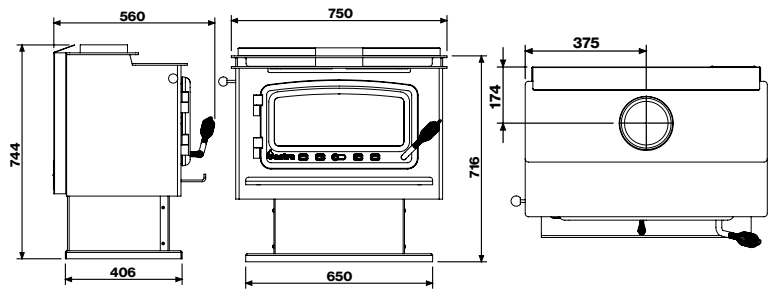

INSTALLATION

All Nectre wood heaters have been tested (Installation Standard AS/NZS 2918) to ensure that they will meet the appropriate safety Standard requirements if the instructions in this manual are followed. Check local building regulations before installing the appliance.

We recommend that the installation of your nectre wood heater be carried out by a qualified installer.

* Terms and conditions apply, see Installation and Operations Manual for warranty details.




Glen Dimplex Australia Ltd

Glen Dimplex Australia Ltd's policy is one of continuous development. We reserve the right to change size and specifications without notice. For the latest product information and warranty details please refer to www.nectre.com.au. Please refer to the installation and operation instructions before having your Nectre Wood Fire installed. A full set of these instructions is supplied with each fire.

nectre.com.au


CLEARANCES

Corner Installation



	Single rear shield	Decro + inner	Solid + inner
Corner - C1	200mm	125mm	100mm
Corner - C2	573mm	498mm	473mm
Floor - F	350mm	350mm	350mm

Standard Installation



	Single rear flue shield	Decro + inner OR Solid outer + inner
Side - S1	450mm	350mm
Side - S2	825mm	725mm
Rear - R1	125mm	125mm
Rear - R2	299mm	299mm
Floor - F	350mm	350mm